

INDUSTRIAL VALVE AND ENGINEERING SUPPLIES (Pty) Ltd. / VEMCO (Pty) Ltd

VAT REG NO: 4280104276 CO REG NO 83/05965/07

VAT REG NO:4200211854 CO REG NO 1979/002851/07



Head Office: 114 Plane Road, Spartan, Gauteng
 Tel: 27-11-394-2066 (21 LINES)
 Fax: 27-11-394-2476
 E-Mail: industrialvalve@futurejhb.co.za
 Web: www.industrialvalve.co.za

Durban: 499 Sydney Rd, Harbour Bridge Park
 Unit 14, Durban
 Tel: 27-31-205-0218
 Fax: 27-31-205-0210
 E-Mail: iveskzn@futurejhb.co.za

Nelspruit: 19 Tabak Str
 Nelspruit
 Tel: 27-13-752-2372
 Fax: 27-13-752-8079
 E-Mail: ivesnelspruit@industrialvalve.co.za



FIG 20SS THERMODYNAMIC STEAM TRAP STAINLESS STEEL

FEATURES



WORKING PRESSURE 0.3 BAR - 40 BAR
 MAXIMUM BACK PRESSURE SHOULD NOT EXCEED 80 % OF THE INLET PRESSURE
 BSP 21 TAPER THREAD
 ENTIRE CONSTRUCTION IN STAINLESS STEEL FOR EXCELLENT MECHANICAL AND CORROSION RESISTANCE
 HARDENED DISC AND SEAT TO WITHSTAND REPEATED WATER HAMMER
 REPLACEABLE STAINLESS STEEL SCREEN

WORKING PRESSURE (BAR) NON SHOCK

PRIMARY SERVICE	HYDROSTATIC TEST PRESSURE	
40 BAR @ 250 DEG C	SHELL	80 BAR

CAPACITY KG/HR

BAR SIZE MM \ BAR	0.3	1	2	3	5	8	10	20	30	40
15	160	180	200	220	260	360	420	590	690	780
20	192	216	240	264	312	432	504	708	828	936
25	320	420	520	740	860	1000	1130	1260	1380	1500

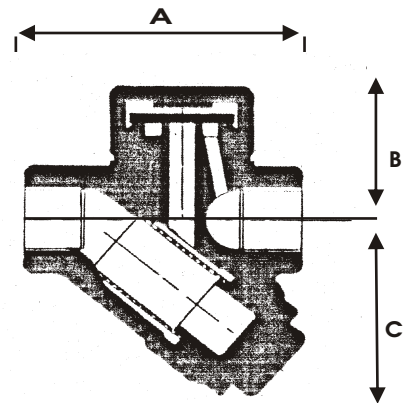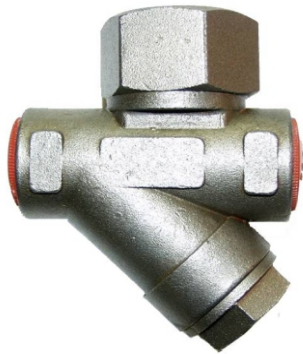

ITEM	SPECIFICATION
BODY	AISI-420
CAP	AISI-420
DISC SEAT	AISI 420
SCREEN	AISI 304
STRAINER/CAP	AISI-420
GASKET	NON-ASBESTOS

SIZE BSP	A	B	C	MASS KG
15	78	41	54	0.85
20	78	41	54	0.85
25	90	54	70	1.4

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Break Away
VALVES

TECHNOLOGY AT ITS BEST