

# INDUSTRIAL VALVE AND ENGINEERING SUPPLIES (Pty) Ltd. / VEMCO (Pty) Ltd

VAT REG NO: 4280104276 CO REG NO 83/05965/07

VAT REG NO:4200211854 CO REG NO 1979/002851/07



Head Office: 114 Plane Road, Spartan, Gauteng  
 Tel: 27-11-394-2066 (21 LINES)  
 Fax: 27-11-394-2476  
 E-Mail: industrialvalve@futurejhb.co.za  
 Web: www.industrialvalve.co.za


Durban: 499 Sydney Rd, Harbour Bridge Park  
 Unit 14, Durban  
 Tel: 27-31-205-0218  
 Fax: 27-31-205-0210  
 E-Mail: iveskzn@futurejhb.co.za

Nelspruit: 19 Tabak Str  
 Nelspruit  
 Tel: 27-13-752-2372  
 Fax: 27-13-752-8079  
 E-Mail: ivesnelspruit@industrialvalve.co.za



## FIG: FLEI/SCR RUBBER FLEXIBLES SCREWED

- 1) RUBBER
- 2) POLYAMID CORD FABRICS PRESSED WITH STEEL WIRE
- 3) GALV UNION FITTING BSP

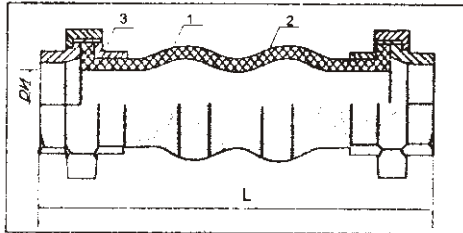


### DATA SHEET


Nominal Inside Diameter		Length (mm) L	Axial Shift (mm)		Crosswise shift (mm)	Angle of Deflexim (a1+a2)
(mm)	inch		Expand	Contract		
20	(3/4)	180	5-6	22	22	45°
25	(1)	190	5-6	22	22	45°
32	(1 1/4)	200	5-6	22	22	45°
40	(1 1/2)	210	5-6	22	22	45°
50	2	212	5-6	22	22	45°
65	(2 1/2)	245	5-6	22	22	45°
80	3	260	5-6	22	22	45°

### Technical Specifications


Working pressure	10 BAR
Testing pressure	20 BAR
Demolition pressure	30 BAR
Vacuum degree	54 Kpa
Suitable temperature	-20 - 115 Deg C
Suitable medium	Vapor ,compressed air,water seawater,hot water ,weak acid




Axial contract



Axial expand



Angle of deflection



Crosswise shift

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

*Break Away*  
VALVES

## TECHNOLOGY AT ITS BEST